


STAINLESS STEEL CHAIN

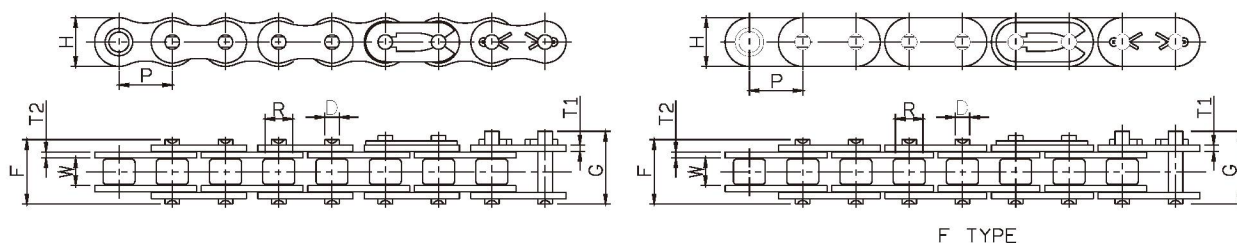

F TYPE

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Allowable Load kgf(max)	Approx Weight kg/m
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
* 25SS	1/4"	6.35	3.10	3.30	6.02	0.75	0.75	2.31	9.1	11.6	12	0.13
* 35SS	3/8"	9.525	4.68	5.08	9.05	1.25	1.25	3.60	13.2	16.5	27	0.34
40SS	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.98	17.8	21.7	45	0.61
50SS	5/8"	15.875	9.40	10.16	15.09	2.00	2.00	5.09	21.8	25.9	70	1.03
60SS	3/4"	19.05	12.57	11.91	18.10	2.40	2.40	5.96	26.9	31.5	105	1.48
80SS	1"	25.40	15.75	15.88	24.13	3.20	3.20	7.94	33.5	38.9	180	2.58
100SS	1-1/4"	31.75	18.90	19.05	30.17	4.00	4.00	9.54	41.1	47.2	260	3.86
120SS	1-1/2"	38.10	25.22	22.23	36.20	4.80	4.80	11.11	50.8	57.4	390	5.70
C2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	45	0.50
C2042SS	1"	25.40	7.85	15.88	12.0	1.50	1.50	3.98	17.8	21.7	45	0.84
A2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	45	0.41
C2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	70	0.80
C2052SS	1-1/4"	31.75	9.40	19.05	15.0	2.00	2.00	5.09	21.8	25.9	70	1.26
A2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	70	0.65
C2060HSS	1-1/2"	38.10	12.57	11.91	18.0	3.20	3.20	5.96	30.2	34.8	105	1.37
C2062HSS	1-1/2"	38.10	12.57	22.23	18.0	3.20	3.20	5.96	30.2	34.8	105	2.07
C2080HSS	2"	50.80	15.75	15.88	24.1	4.00	4.00	7.94	37.4	42.8	180	2.38
C2082HSS	2"	50.80	15.75	28.58	24.1	4.00	4.00	7.94	37.4	42.8	180	3.39
C2100HSS	2-1/2"	63.50	18.90	19.05	30.1	4.80	4.80	9.54	44.5	50.6	275	3.56
C2102HSS	2-1/2"	63.50	18.90	39.67	30.1	4.80	4.80	9.54	44.5	50.6	275	5.70
06BSS	0.375"	9.525	5.72	6.35	8.26	1.00	1.30	3.28	13.5	16.8	27	0.39
08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	17.0	20.9	50	0.66
10BSS	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	19.6	23.7	66	0.92
12BSS	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	22.7	27.3	90	1.26
16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	36.1	41.5	209	2.74
20BSS	1.25"	31.75	19.56	19.05	26.42	3.50	4.50	10.19	43.2	49.3	295	3.93
24BSS	1.5"	38.10	25.40	25.40	33.40	5.20	6.00	14.63	53.4	60.0	545	7.32
40FSS	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.98	17.8	21.7	45	0.68
50FSS	5/8"	15.875	9.40	10.16	15.09	2.00	2.00	5.09	21.8	25.9	70	1.16
60FSS	3/4"	19.05	12.57	11.91	18.10	2.40	2.40	5.96	26.9	31.5	105	1.69
80FSS	1"	25.40	15.75	15.88	24.13	3.20	3.20	7.94	33.5	38.9	180	2.95

* Rollerless chain, R indicates bushing diameter.

Material: AISI 304, with slightly magnetic due to cold forming of parts.