



D1 & D3 ATTACHMENTS

D1

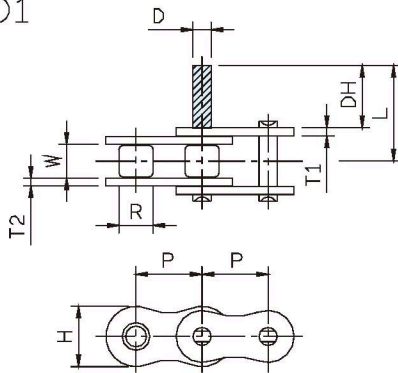

D3

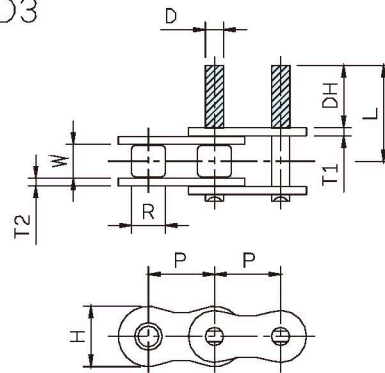


CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Allowable Load kgf(max)
	P		W	Dia	Height	Thickness		Dia	Lenght		
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	±DH	L	
06BSS	0.375"	9.525	5.72	6.35	8.26	1.00	1.30	3.28	11.30	16.63	27
08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	14.80	22.05	50
10BSS	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	17.60	26.05	66
12BSS	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	20.70	30.48	90
16BSS	1"	25.40	17.02	15.88	21.80	3.20	4.00	8.28	33.30	49.33	209


DH length(Pin extension)per requested

Note : AISI 304 chain is with slightly magnetic due to cold forming of parts.

D1

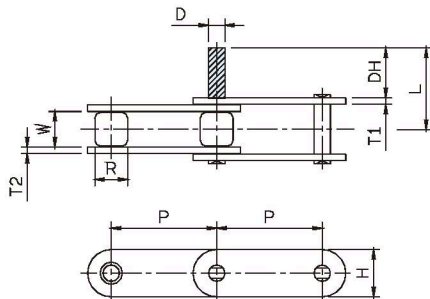

D3

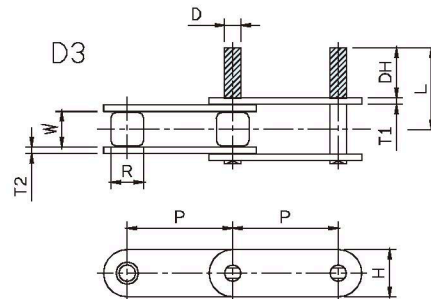

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Allowable
	P		W	Dia	Height	Thickness		Dia	Lenght		Load
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	±DH	L	kgf(max)
A2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	9.52	16.72	45
A2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	11.91	20.96	70
C2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	9.52	16.72	45
C2042SS	1"	25.40	7.85	15.88	12.0	1.50	1.50	3.98	9.52	16.72	45
C2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	11.91	20.96	70
C2052SS	1-1/4"	31.75	9.40	19.05	15.0	2.00	2.00	5.09	11.91	20.96	70
C2060HSS	1-1/2"	38.10	12.57	11.91	18.0	3.20	3.20	5.96	14.27	27.07	105
C2062HSS	1-1/2"	38.10	12.57	22.23	18.0	3.20	3.20	5.96	14.27	27.07	105
C2080HSS	2"	50.80	15.75	15.88	24.10	4.00	4.00	7.94	19.05	35.18	180
C2082HSS	2"	50.80	15.75	28.58	24.10	4.00	4.00	7.94	19.05	35.18	180

DH length(Pin extension)per requested

Note : AISI 304 chain is with slightly magnetic due to cold forming of parts.