



ROLLER CHAIN ATTACHMENTS


SA1

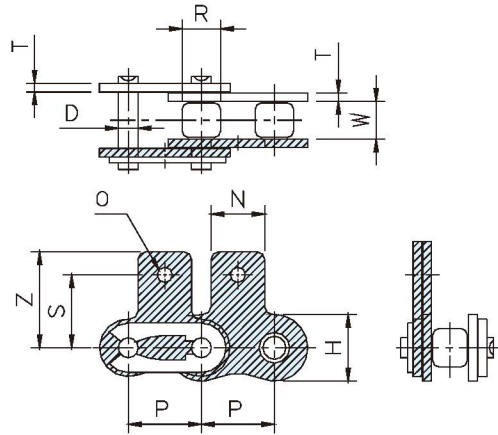


SK1

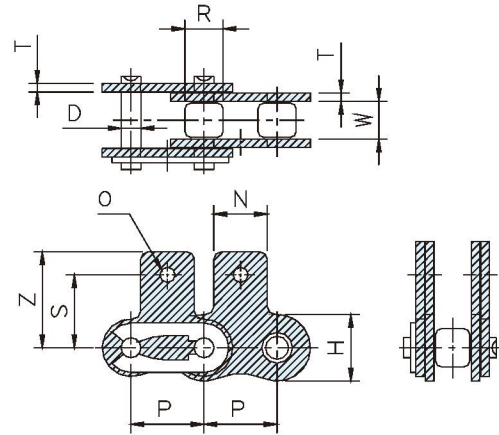

A1

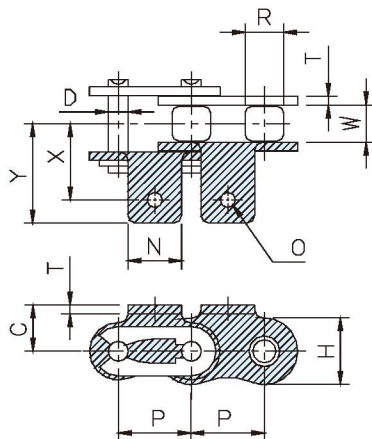

K1

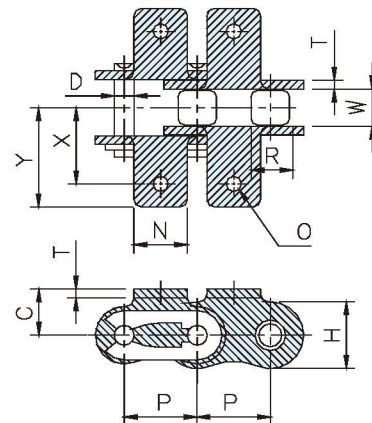


CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment							Allowable
	P		W	Dia	Height	Thick.	Dia	A-1,K-1							Load kgf(max)
	inch	mm	(min)	R(max)	H(max)	T	D(max)	N	O(min)	C	X	Y	S	Z	
25SS	1/4"	6.35	3.10	3.30	6.02	0.75	2.31	5.60	3.45	4.75	7.15	10.7	—	—	12
35SS	3/8"	9.525	4.68	5.08	9.05	1.25	3.60	7.90	2.60	3.30	6.35	9.50	14.30	9.50	27
40SS	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	9.50	3.50	8.00	12.70	17.80	12.70	17.40	45
50SS	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	12.70	5.10	10.30	15.90	23.40	15.90	23.05	70
60SS	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	15.90	5.10	11.90	19.05	28.20	18.30	26.85	105
80SS	1"	25.40	15.75	15.88	24.13	3.20	7.94	19.10	6.70	15.90	25.40	36.60	24.60	35.45	180

Any special specifications, please feel free to contact us.


Note : AISI 304 chain is with slightly magnetic due to cold forming of parts.

ROLLER CHAIN ATTACHMENTS


WSA1

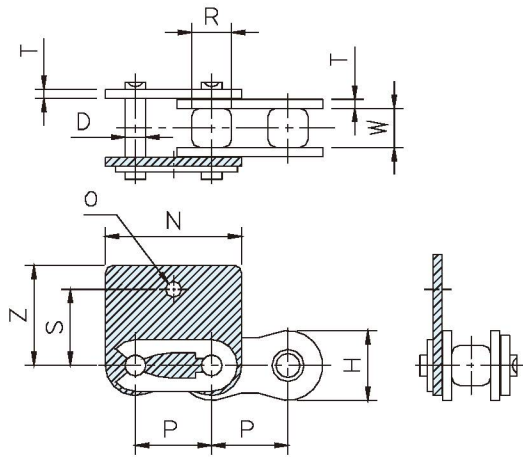


WSK1

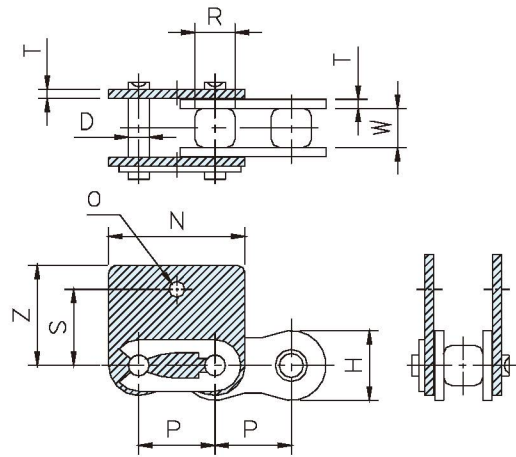

WA1

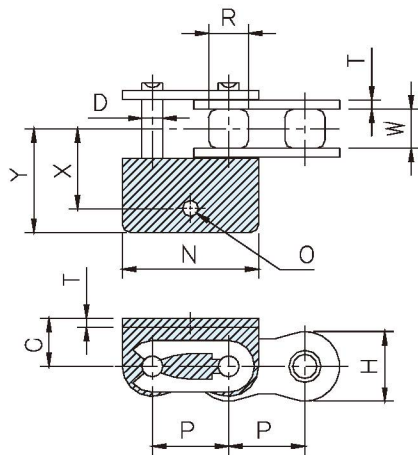

WK1

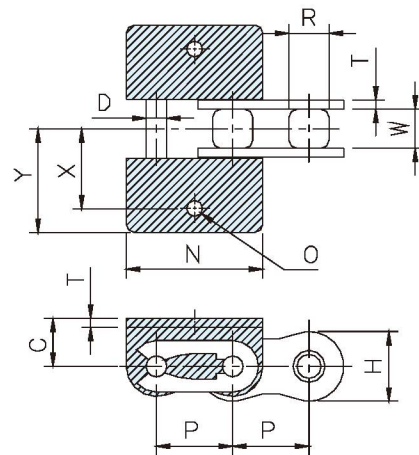


CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment								Allowable
	P		W	Dia	Height	Thick.	Dia		WA1 WK1	WSA1 WSK1	WA1,WK1			WSA1,WSK1		Load
	inch	mm	(min)	R(max)	H(max)	T	D(max)	N	O(min)		C	X	Y	S	Z	kgf(max)
35SS	3/8"	9.525	4.68	5.08	9.05	1.25	3.60	17.10	3.50	—	6.35	9.50	14.30	—	—	27
40SS	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	22.90	3.30	4.40	8.00	12.70	17.80	12.70	17.40	45
50SS	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	28.70	5.10	5.40	10.30	15.90	23.40	15.90	23.05	70
60SS	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	34.60	6.50		11.90	19.05	28.20	18.30	27.10	105
80SS	1"	25.40	15.75	15.88	24.13	3.20	7.94	45.70	6.75\8.90	8.90	15.90	25.40	36.60	24.60	35.45	180

Any special specifications, please feel free to contact us.


Note : AISI 304 chain is with slightly magnetic due to cold forming of parts.

ROLLER CHAIN ATTACHMENTS


WSA2

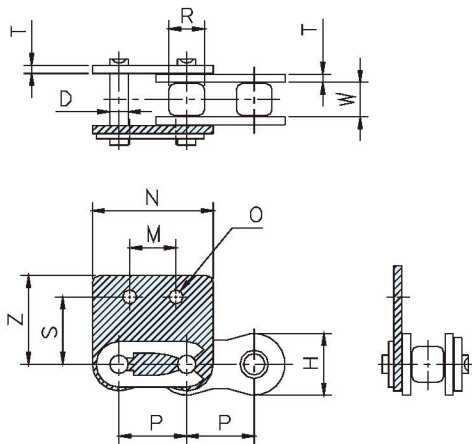


WSK2

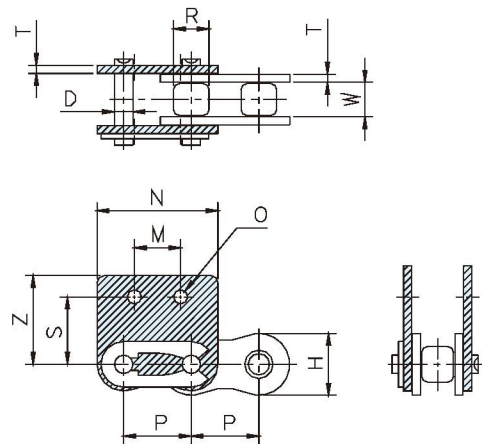

WA2

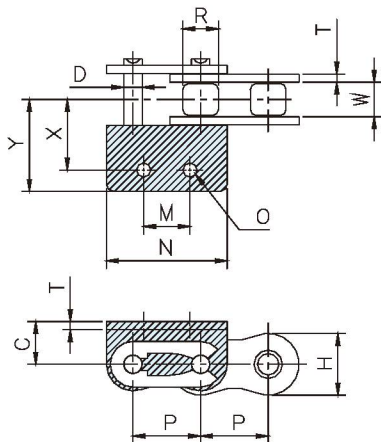

WK2

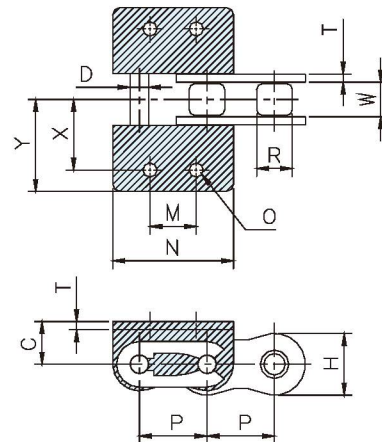

CHAIN NO.	Pitch		Width	Roller	Plate		Pin	Attachment										Allowable
	P		W	Dia	Height	Thick.	Dia	WA2 WK2	WSA2 WSK2		WA2 WK2	WSA2 WSK2	WA2,WK2			WSA2,WSK2		Load
	inch	mm	(min)	R(max)	H(max)	T	D(max)	M	N		O(min)	C	X	Y	S	Z	kgf(max)	
40SS	1/2"	12.70	7.85	7.92	12.07	1.50	3.98	9.50	22.90	3.30	4.40	8.00	12.70	17.80	12.70	17.60	45	
50SS	5/8"	15.875	9.40	10.16	15.09	2.00	5.09	11.90	28.70	5.10	5.40	10.30	15.90	23.40	15.90	23.05	70	
60SS	3/4"	19.05	12.57	11.91	18.10	2.40	5.96	14.30	34.60	5.10	6.50	11.90	19.05	28.20	18.30	27.10	105	
80SS	1"	25.40	15.75	15.88	24.13	3.20	7.94	19.1/25.4	19.10	45.70	6.75	8.90	15.90	25.40	36.60	24.60	35.45	180

Any special specifications, please feel free to contact us.