


DOUBLE-PLUS CHAIN

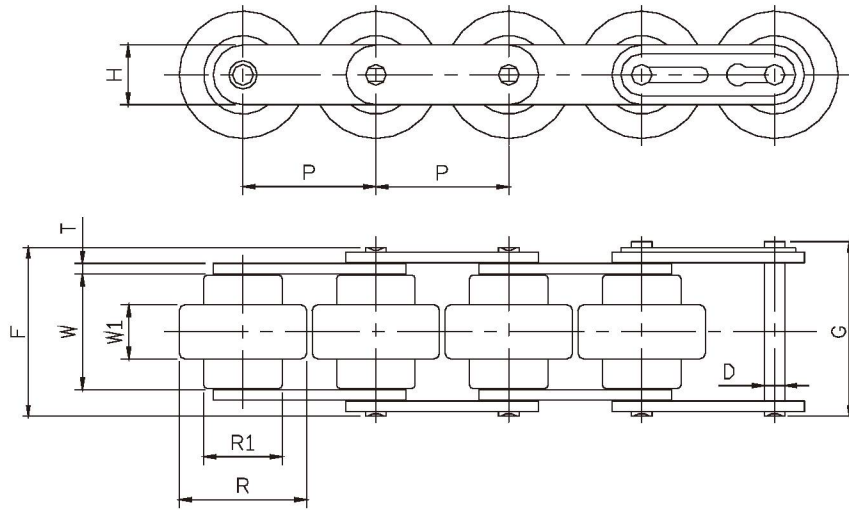

REGULAR CHAIN

CHAIN NO.	Pitch		Width	Roller			Plate		Pin			Average Ultimate Strength kgf	Approx Weight kg/m
	P		W	Height	Dia		Height	Thick.	Dia	Length			
	inch	mm	mm	W1	R	R1	H(max)	T	D(max)	F	G		
C2050-JDS ★	1.25"	31.75	27.40	12.60	30.60	19.05	15.0	2.00	5.09	39.2	40.7	3000	1.40
C2060H-TDS	1.50"	38.10	40.60	20.00	37.00	17.80	18.0	3.20	5.96	56.8	58.35	4200	2.10
C2060H-JDS	1.50"	38.10	33.10	15.50	36.50	22.50	18.0	3.20	5.96	49.3	50.85	4200	2.00

SOLID (SBR-L) CHAIN

CHAIN NO.	Pitch		Width	Roller			Plate		Pin			Average Ultimate Strength kgf	Approx Weight kg/m
	P		W	Height	Dia		Height	Thick.	Dia	Length			
	inch	mm	mm	W1	R	R1	H(max)	T	D(max)	F	G		
C2050 SBR-L JDS ★	1.25"	31.75	27.40	12.60	30.60	19.05	15.0	2.00	5.09	39.2	40.7	3000	1.43
C2060H SBR-L TDS	1.50"	38.10	40.60	20.00	37.00	17.80	18.0	3.20	5.96	56.8	58.35	4200	2.14
C2060H SBR-L JDS	1.50"	38.10	33.10	15.50	36.50	22.50	18.0	3.20	5.96	49.3	50.85	4200	2.04

Electro-conductive Type Big Center Roller available at request.
Snap cover top available at size C2050 at request.

SNAP COVER (CVR)-

Snap covers have been developed to prevent small objects, example screws, chips, from jamming the conveyor line.

This is currently available on size C2050 JDS & C2050 SBR-L JDS (Patented : M279422)

