



ISO "B" ROLLER CHAIN ATTACHMENTS


SA1

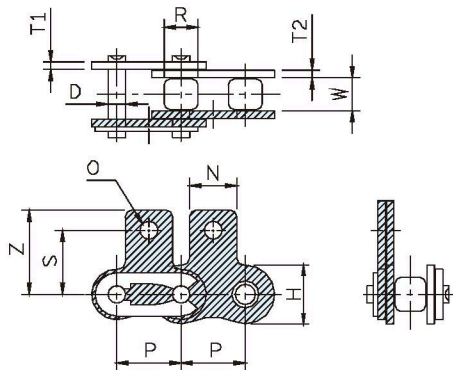


SK1

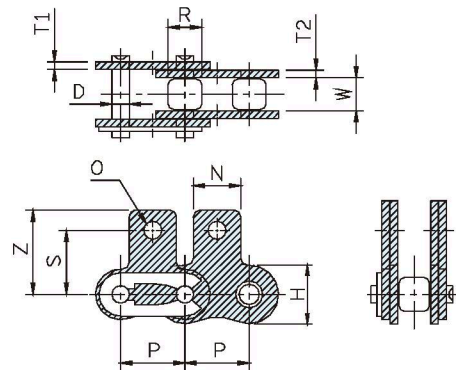

A1

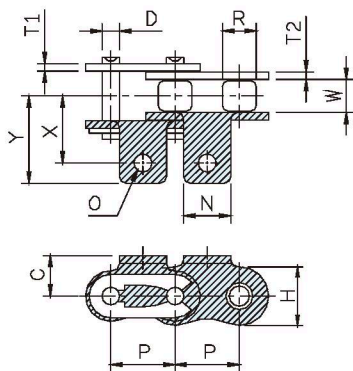

K1

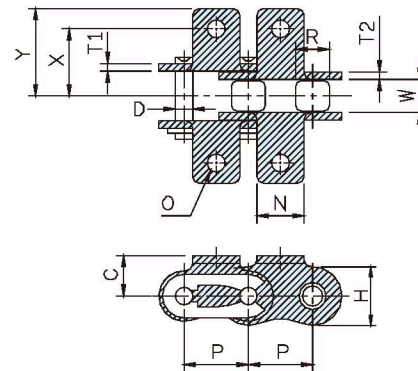


CHAIN NO.	Pitch		Width	Roller	Plate			Pin	Attachment								Ultimate
	P		W	Dia	Height	Thick.		Dia		SA-1 SK-1	A-1 K-1	A-1,K-1			SA-1,SK-1	Strength	
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	N	O(min)		C	X	Y	S	Z	kgf(min)
08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		—	—	—	13.70	20.80	1816
D08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		—	—	—	13.00	20.80	1816
K08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	11.00	4.30		8.90	13.80	20.85	—	—	1816
10B	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	14.00	5.30		10.30	15.90	24.80	16.50	24.90	2265
12B	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	18.00	6.60		12.20	17.60	26.35	18.50	28.20	2949
D12B	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	18.00	6.40	6.60	—	—	—	21.00	28.20	2949
16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	8.40		17.00	29.00	41.90	27.40	39.70	6122
D16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	6.60		—	—	—	23.00	39.70	6122
K16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	24.00	8.40		17.00	29.00	42.80	—	—	6122


Any special specifications, please feel free to contact us.

ISO "B" ROLLER CHAIN ATTACHMENTS


WSA1

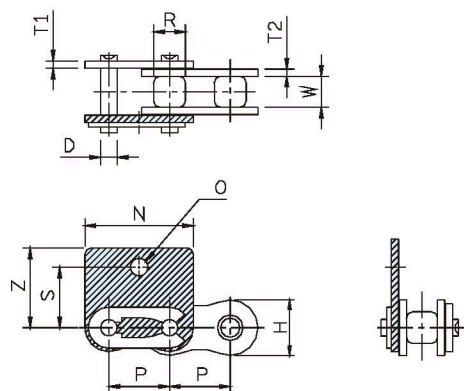


WSK1

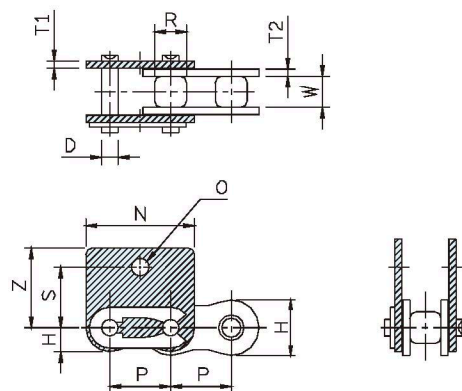

WA1

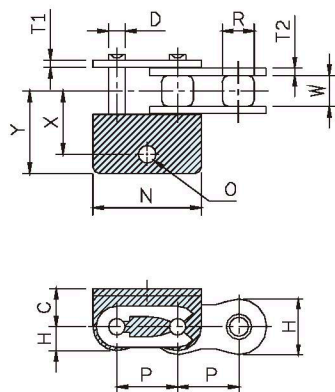

WK1

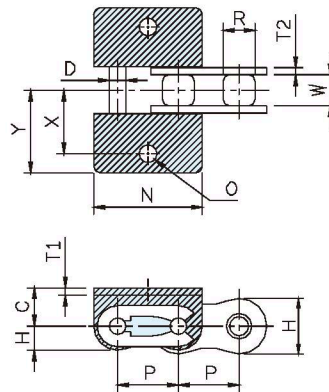


CHAIN NO.	Pitch		Width	Roller	Plate			Pin	Attachment							Ultimate Strength kgf(min)	
	P		W	Dia	Height	Thick.		Dia				WA-1,WK-1			WSA-1,WSK-1		
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	N	O(min)	C	X	Y	S	Z		
08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	22.90	4.30	—	—	—	13.70	20.80	1816	
K08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	22.90	4.30	8.90	13.80	20.85	—	—	1816	
10B	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	28.95	5.30	10.30	15.90	24.80	16.50	24.90	2265	
12B	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	36.00	6.60	12.20	17.60	26.35	18.50	28.20	2949	
16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	8.40	17.00	29.00	41.90	27.40	39.70	6122	
D16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	6.60	—	—	—	23.00	39.70	6122	
K16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	45.70	8.40	17.90	29.00	42.80	—	—	6122	


Any special specifications, please feel free to contact us.

ISO "B" ROLLER CHAIN ATTACHMENTS


WSA2

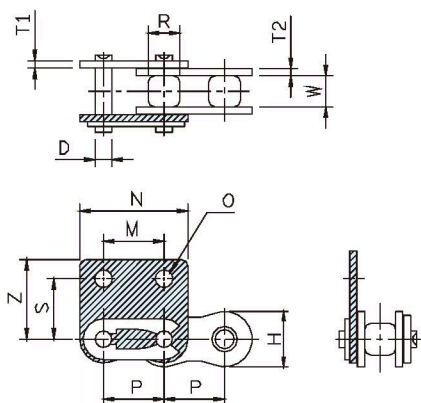


WSK2

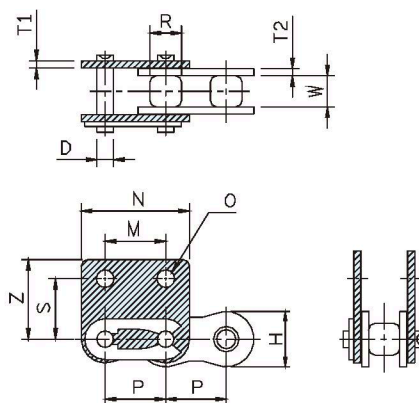

WA2

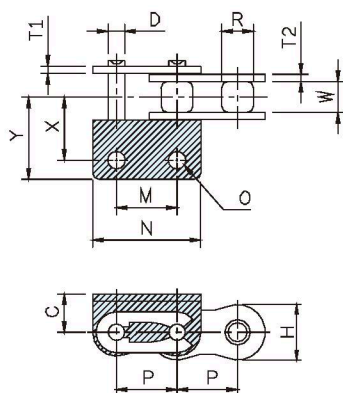

WK2

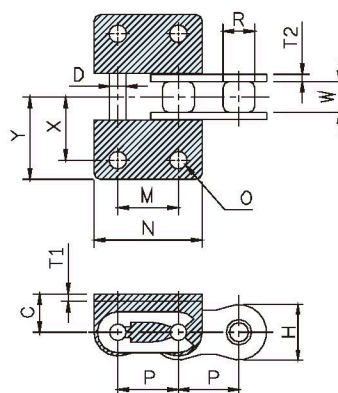

CHAIN NO.	Pitch		Width	Roller	Plate			Pin	Attachment								Ultimate Strength kgf(min)
	P		W	Dia	Height	Thick.		Dia				WA-2,WK-2			WSA-2,WSK-2		
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	M	N	O	C	X	Y	S	Z	
08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	12.70	22.90	4.30	—	—	—	13.70	20.80	1816
K08B	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	12.70	22.90	4.30	8.90	13.80	20.85	—	—	1816
10B	0.625"	15.875	9.65	10.16	14.73	1.50	1.50	5.08	15.88	28.95	5.30	10.30	15.90	24.80	16.50	24.90	2265
12B	0.75"	19.05	11.68	12.07	16.13	1.70	1.80	5.72	19.05	36.00	6.60	12.20	17.60	26.35	18.50	28.20	2949
16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	25.40	45.70	8.40	17.00	29.00	41.90	27.40	39.70	6122
K16B	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	25.40	45.70	8.40	17.90	29.00	42.80	—	—	6122

Any special specifications, please feel free to contact us.