



SELF-LUBE CHAIN

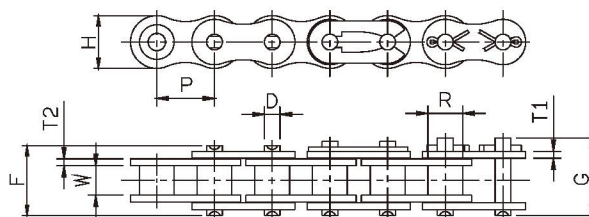


CHAIN NO.	Pitch		Width	Bush	Plate			Pin			Ultimate Strength kgf(ave.)	Approx Weight kg/m
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
40SL	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.98	17.8	21.7	1300	0.60
40NSL	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.60	17.8	21.7	1200	0.61
50SL	5/8"	15.875	9.40	10.16	15.09	2.00	2.00	5.09	21.8	25.9	2000	0.98
60SL	3/4"	19.05	12.57	11.91	18.10	2.40	2.40	5.96	26.9	31.5	2800	1.40
80SL	1"	25.40	15.75	15.88	24.13	3.20	3.20	7.94	33.5	38.9	5800	2.46
16BNSL	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	36.1	41.5	8000	2.67

SL chain standard is rollerless, R indicates bushing diameter. Bushing is solid type.
NSL chain is with roller.

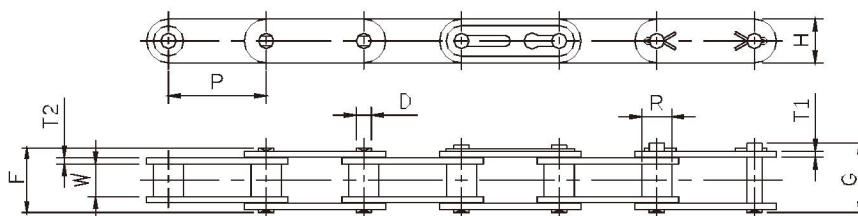

CHAIN NO.	Pitch		Width	Bush	Plate			Pin			Ultimate Strength kgf(ave.)	Approx Weight kg/m
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
C2040SL	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	1300	0.50
C2050SL	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	2000	0.79
C2060SL	1-1/2"	38.10	12.57	11.91	18.0	2.40	2.40	5.96	26.9	31.5	2800	1.08
C2080SL	2"	50.80	15.75	15.88	24.1	3.20	3.20	7.94	33.5	38.9	5800	1.94

SL chain standard is rollerless, R indicates bushing diameter. Bushing is solid type.

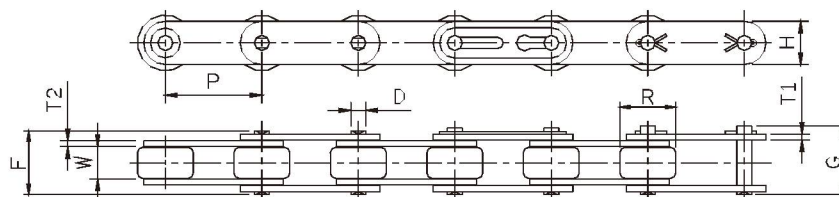

CHAIN NO.	Pitch		Width	Roller	Plate			Pin			Ultimate Strength	Approx Weight
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)	G(max)		
C2042SL	1"	25.40	7.85	15.88	12.0	1.50	1.50	3.98	17.8	21.7	1300	0.85
C2052SL	1-1/4"	31.75	9.40	19.05	15.0	2.00	2.00	5.09	21.8	25.9	2000	1.26
C2062SL	1-1/2"	38.10	12.57	22.23	18.0	2.40	2.40	5.96	26.9	31.5	2800	1.77
C2082SL	2"	50.80	15.75	28.58	24.1	3.20	3.20	7.94	33.5	38.9	5800	3.02